


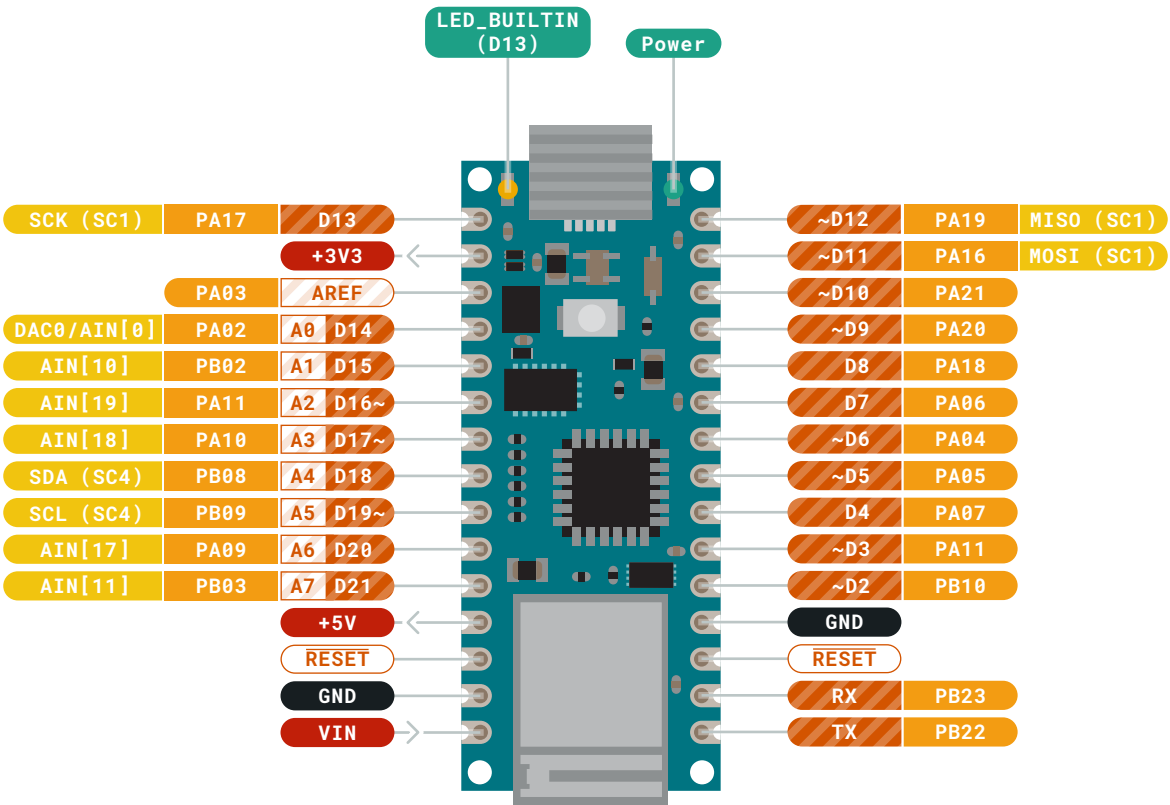

- Ground

Power

LED

Internal Pin

SWD Pin
- Digital Pin

Analog Pin

Other Pin

Microcontroller's Port

Default


- ⚠

MAXIMUM current per pin is 7mA
- ⚠


MAXIMUM source current is 46mA
- ⚠

MAXIMUM sink current is 65mA per pin group

VIN 5-21 V input to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

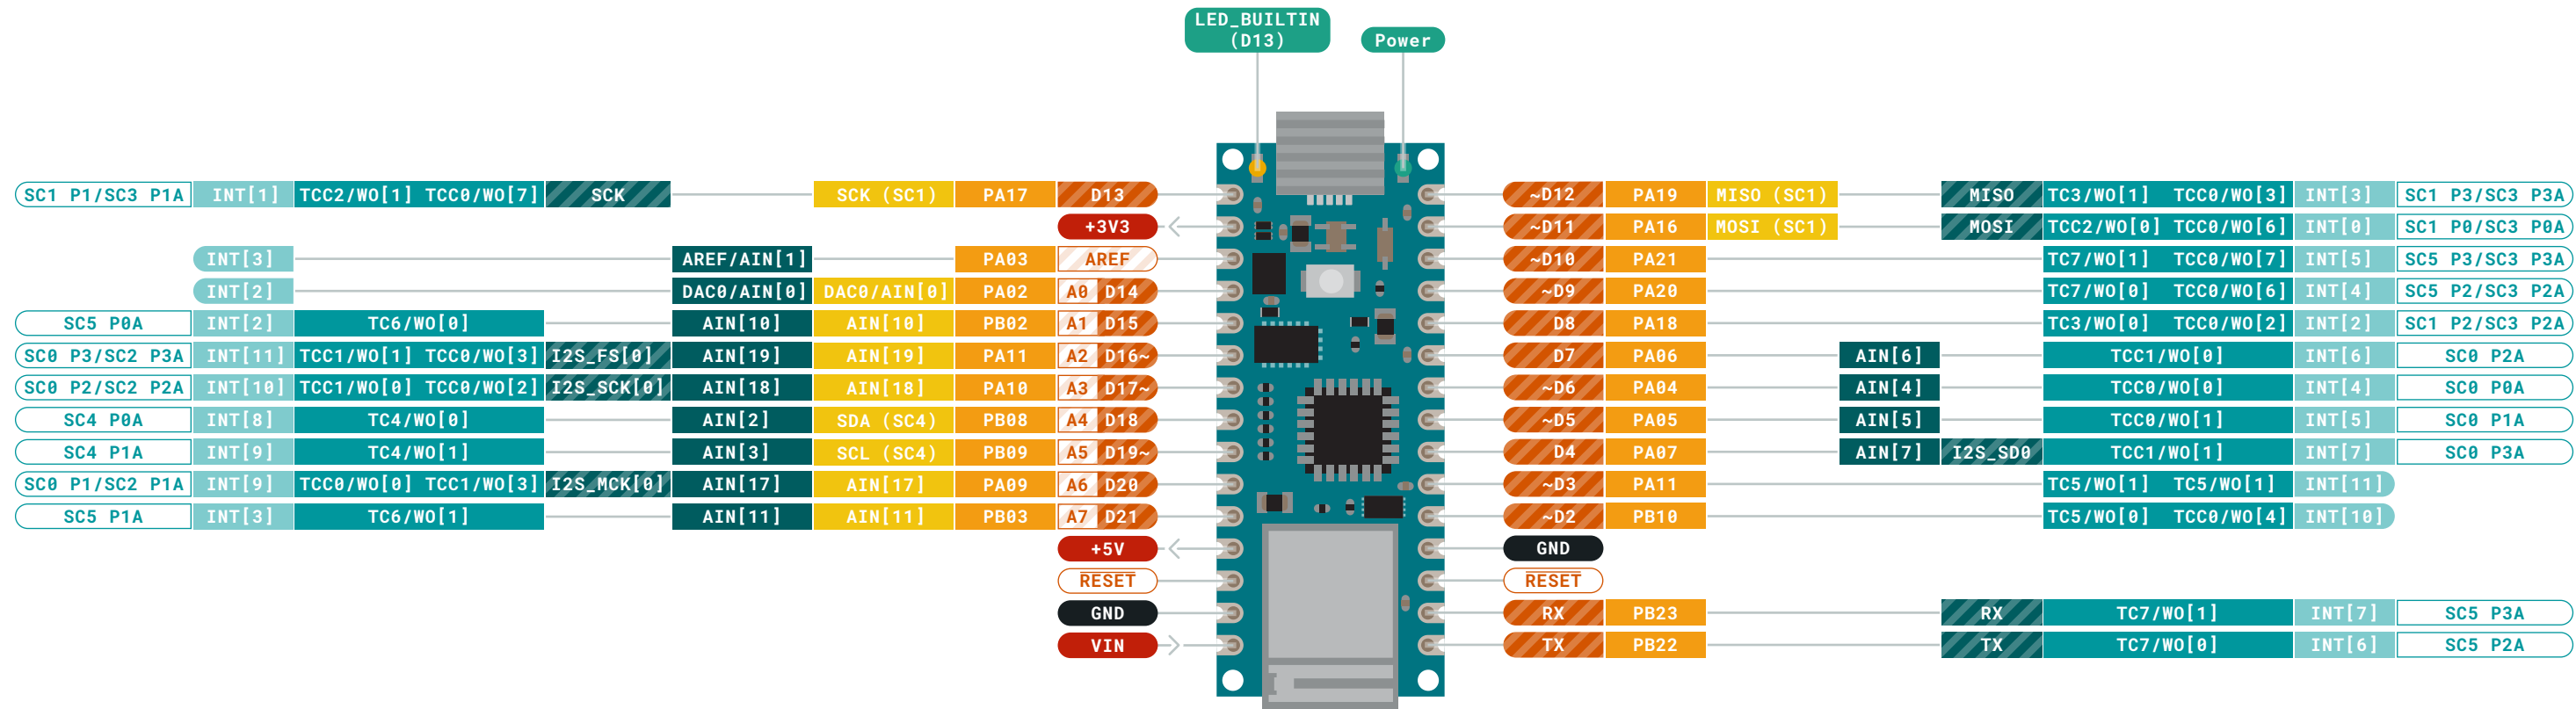


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom

- MAXIMUM** current per pin is 7mA
- MAXIMUM** source current is 46mA
- MAXIMUM** sink current is 65mA per pin group

VIN 5-21 V input to the board.



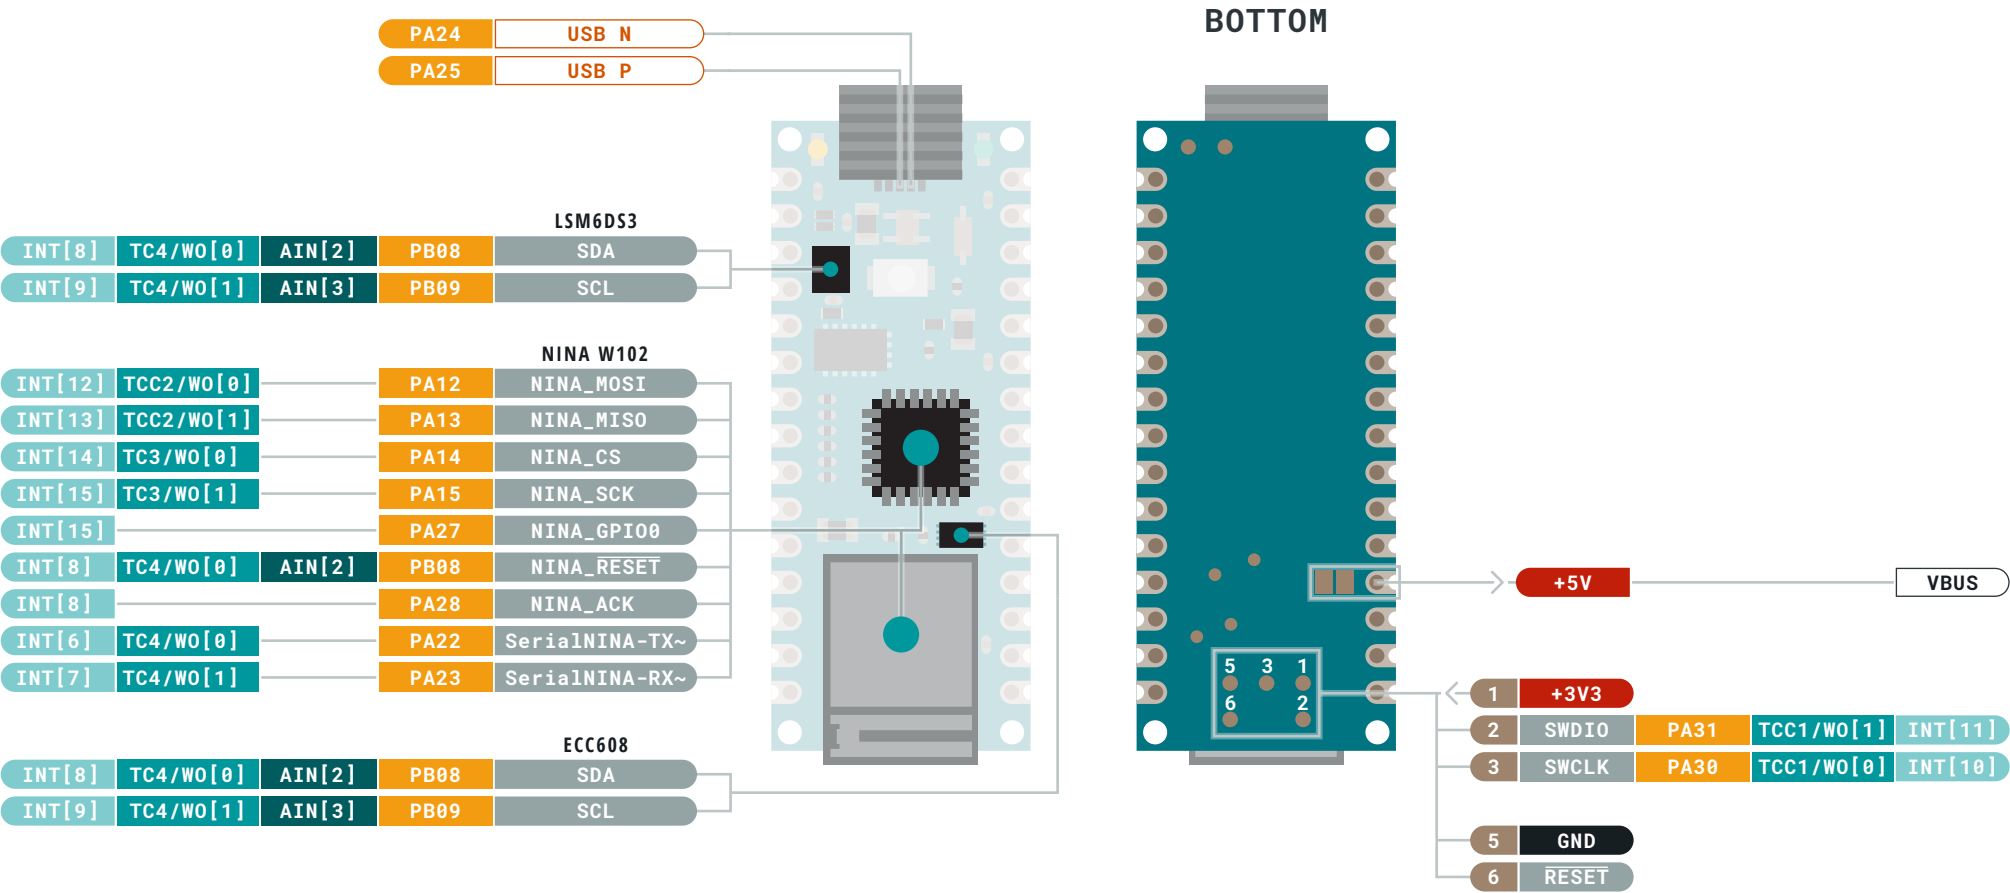

- | | | |
|--------------|------------------------|---------------|
| Ground | Digital Pin | Analog |
| Power | Analog Pin | Communication |
| LED | Other Pin | Timer |
| Internal Pin | Microcontroller's Port | Interrupt |
| SWD Pin | Default | Sercom |

- ⚠ **MAXIMUM** current per pin is 7mA
- ⚠ **MAXIMUM** source current is 46mA
- ⚠ **MAXIMUM** sink current is 65mA per pin group

VIN 5-21 V input to the board.