


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 21/06/05		

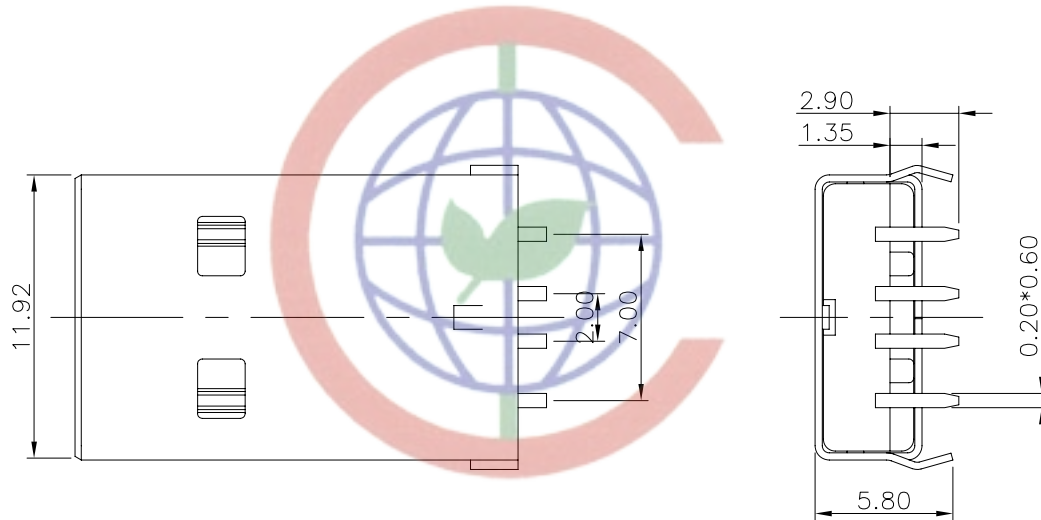

NOTES:



- SPECIFICATIONS:
 - CONTACT RESISTANCE: 30mΩ max.
 - INSULATION RESISTANCE: 1000MΩ min.
 - CURRENT RATING: 1.5A.
 - VOLTAGE RATING: 30VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 Minute.

- MATERIALS:
 - HOUSING: THERMOPLASTIC (UL 94 V-0).
 - CONTACT: COPPER ALLOY
 - SHELL: STEEL

3. PRODUCT NUMBER CODE:

DS1097 - X X X

- CONTACT PLATING
 - 0: Selective Gold Flash
 - 03: Selective Gold 3u"
 - 30: Selective Gold 30u"
- SHELL PLATING
 - N: Nickel
 - 6: Tin
- COLOR OF HOUSING:
 - W: WHITE
 - B: BLACK
- SERIES No. DS1097 series

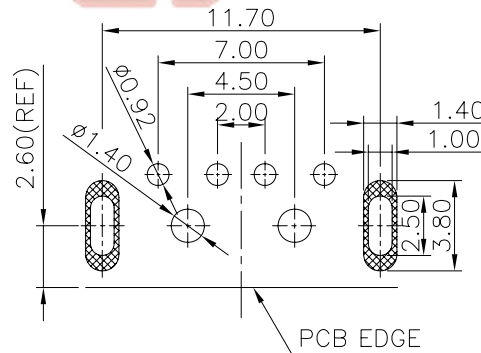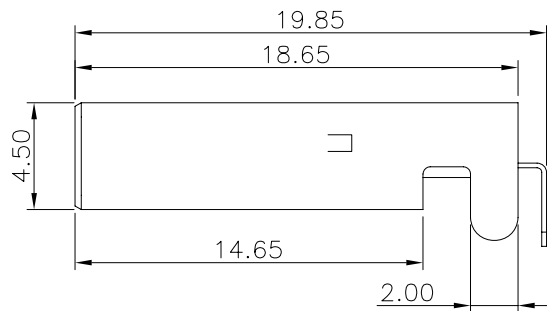

RECOMMEND PCB LAYOUT (TOLERANCE ±0.05)

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	UNITS	mm
.X	±0.38	.X	±3°	SHEET SIZE	A4
.XX	±0.25	.XX	±2°	SERIES DS1097	
DRAWING TYPE		CUSTOMER		USB A TYPE, MALE RIGHT ANGLE TYPE	
SCALE		1:1		SHEET 1 OF 1	
DRAWING NO.		C-DS1097-XXX		CONNFLY CONNFLY ELECTRONIC CO. LTD	



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD