

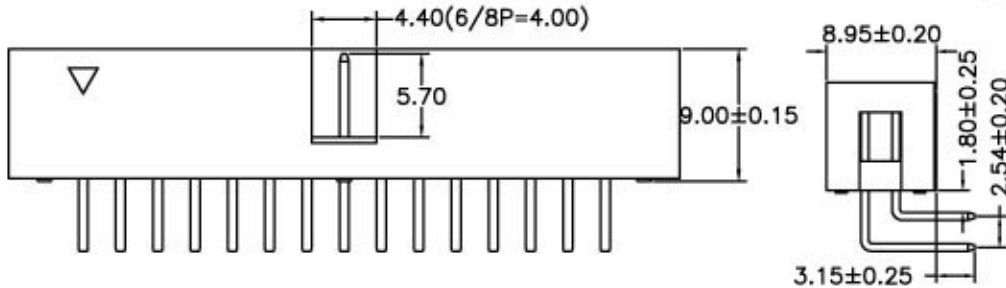


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


SPECIFICATIONS

Current Rating: 3AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/minute
 Operation Temperature: -40 degree up +105 degree

Contact: Brass
 plating: Au or Sn Over 50u" Ni
 Insulator: High Temperature Thermoplastic
 UL94V-0 Rated
 Standard: PBT+30%G.F

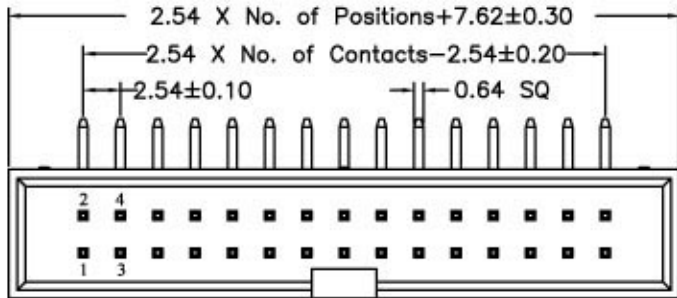

Recommended PCB Layout

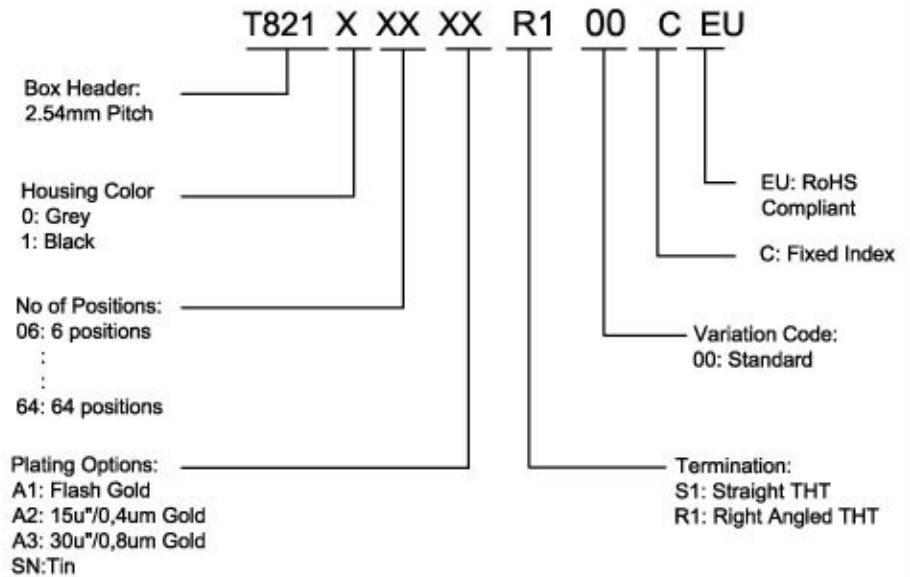

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL
X. ±0.3	DRAWN Roger	12/Jun/2006	Box header, DIP 2.54mm, R/A	Amphenol European Design Center
XX ±0.2	CHECKED Rob K.	13/Jun/2006		
XXX ±0.15	APPROVED Rob K.	14/Jun/2006		
UNLESS OTHERWISE SPECIFIED			SIZE: A4	Scale N.A. Sheet 1 of 1
DRAWING N°			T821X XX XX R100CEU	REV. A